



BS 103 3G | salvaspazio

Industrial luminaires

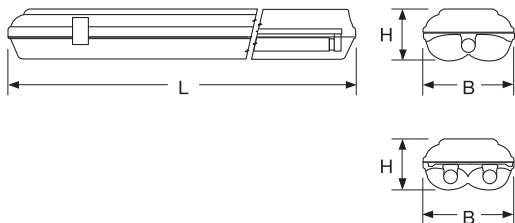

Note: minimum package 3 or multiple pieces, not possible to divide it.
Closing clips in stainless steel, flush fitting with the body.

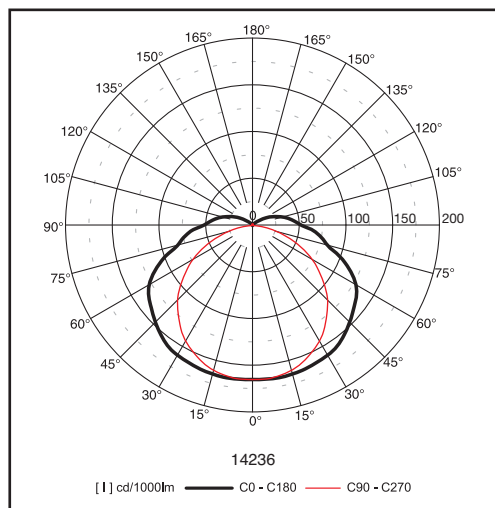

Material

- body: injection molded, self-extinguishing UV-stabilized polycarbonate
- color: gray RAL 7035
- reflector: parabolic in metalised polycarbonate

Degree of protection: IP 65

Rated voltage: 230V/50Hz

Control gear: electronic ballast with the highest energy savings. The luminaires are offered also in emergency version.

Mounting: on ceilings, suspension on chain pendants

Application: washrooms, factory halls, farms, cellars, store houses

Due to its latest generation electronic ballast and highest efficiency optical group, it is possible to obtain the highest energy savings: up to 15% for standard electronic ballast and up to 35% for magnetic ballasts.

Code	Power	Lamp	Cap	LxBxH (mm)	Kg
14118	1x18W	T8 lamp	G13	674x121x82	1,8
14218	2x18W	T8 lamp	G13	674x121x82	1,9
14136	1x36W	T8 lamp	G13	1264x121x82	2,6
14236	2x36W	T8 lamp	G13	1264x121x82	3,1
14158	1x58W	T8 lamp	G13	1564x121x82	3,7
14258	2x58W	T8 lamp	G13	1564x121x82	4,9
14118TR	1x18W	T8 lamp	G13	674x121x82	1,8
14218TR	2x18W	T8 lamp	G13	674x121x82	1,9
14136TR	1x36W	T8 lamp	G13	1264x121x82	2,6
14236TR	2x36W	T8 lamp	G13	1264x121x82	3,1
14158TR	1x58W	T8 lamp	G13	1564x121x82	3,7
14258TR	2x58W	T8 lamp	G13	1564x121x82	4,9

Industrial luminaires



Material

- body: injection molded, self-extinguishing UV-stabilized polycarbonate
- color: gray RAL 7035
- reflector: parabolic in metalised polycarbonate

Degree of protection: IP 65

Rated voltage: 230V/50Hz

Control gear: electronic ballast with the highest energy savings

Mounting: on ceilings, suspension on chain pendants

Application: washrooms, factory halls, farms, cellars, store houses

Due to its latest generation electronic ballast and highest efficiency optical group, it is possible to obtain the highest energy savings: up to 15% for standard electronic ballast and up to 35% for magnetic ballasts.

Code	Power	Lamp	Cap	LxBxH (mm)	Kg
14136TE	1x36W	T8 lamp	G13	1264x121x82	2,6
14236TE	2x36W	T8 lamp	G13	1264x121x82	3,1
14158TE	1x58W	T8 lamp	G13	1564x121x82	3,7
14258TE	2x58W	T8 lamp	G13	1564x121x82	4,9

Version Salvatempo comprises a revolutionary Fast Connector Salvatempo with integrated cables: it is sufficient to start cabling from female mount cable that is provided with the universal reduction to be able to mount Ø16 - Ø20 cables.

Closing clips in stainless steel, flush fitting with the body.

salvatempo | BS 103 3G

